

ELECTRICALLY OPERATED DOUBLE DIAPHRAGM PUMPS FOR THE WORLD'S MOST CHALLENGING FLUID TRANSFER APPLICATIONS.

*Up to **75% LESS ENERGY** consumption than comparable AODD pumps*

★ Proud recipient of Most Innovative Product Design by India Design Mark - 2022-23

★ Most Innovative Energy Saving Product by CII




**WARREN
RUPP, INC.**



Cognito EODD is a smart, IoT-enabled, electrically operated double diaphragm pump. It is engineered and designed for various industrial applications, considering energy efficiency, safety, reliability, easy to use, maintenance-friendly and long-lasting life.


Operating Principle

The pump is driven by an electric motor with a reduction gearbox. This, in turn, drives an eccentric shaft to operate the diaphragms. When the eccentric shaft rotates and reaches peak on one side, for example, the right side of the chamber, the left side of the chamber simultaneously reaches its valley. This causes the extrusion of the right diaphragm and the intrusion of the left diaphragm. As a result, positive pressure is built on the right side (green) and a vacuum on the left side (blue).

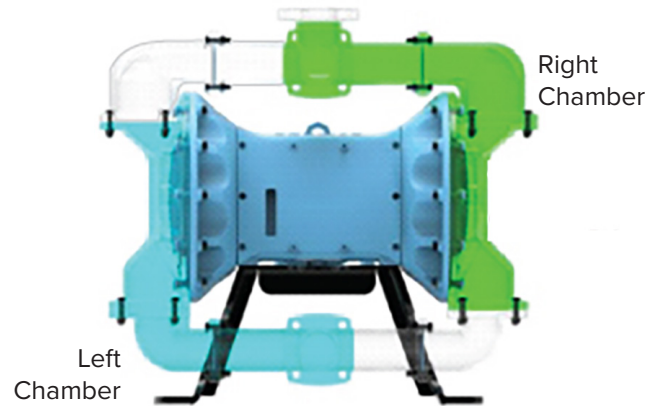


Key Benefits

-  Smoothly handles highly abrasive, corrosive, shear sensitive and viscous fluids
-  Highly energy-efficient pump with significant reduction in energy consumption
-  Robust mechanism delivering hassle-free maintenance
-  Low MTTR (mean time to repair) and high MTBF (mean time between failures)
-  Remote performance monitoring of pump
-  Patented diaphragm designed for better performance and longer life
-  Reduced operating cost
-  Swift ROI/payback
-  Robust design
-  Handles solids
-  Ultra-efficient
-  IoT-enabled

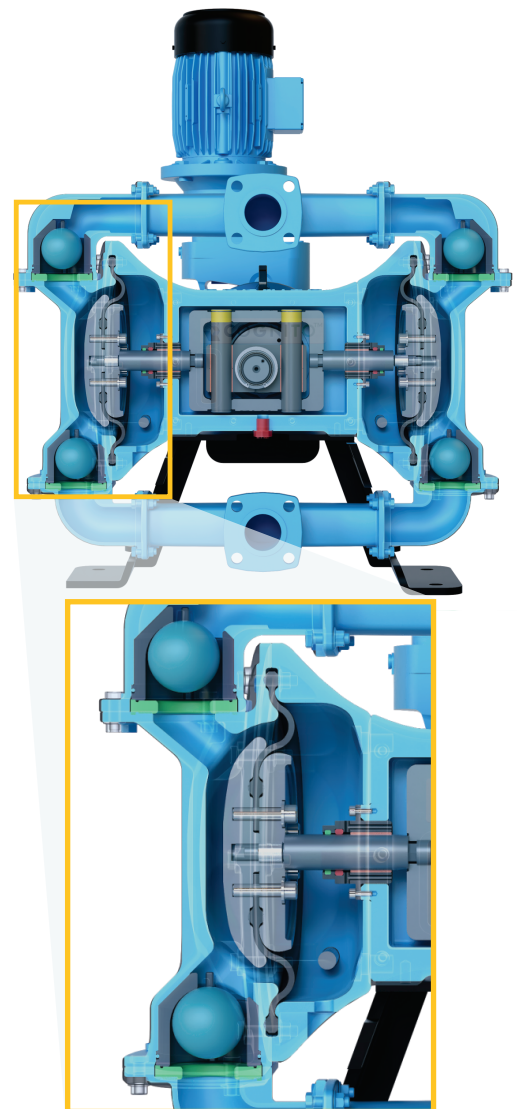

UNIQUE DESIGN FEATURES

- ✓ Oversized diaphragms and optimized stroke length – enhances diaphragm life
- ✓ Hardened stainless steel stopper cages / seats – extends manifold life when pumping abrasive fluids
- ✓ Duel secondary static seals protect pumping mechanism from process fluid
- ✓ Equipped with leak detection probes - protect the people, process and the pump

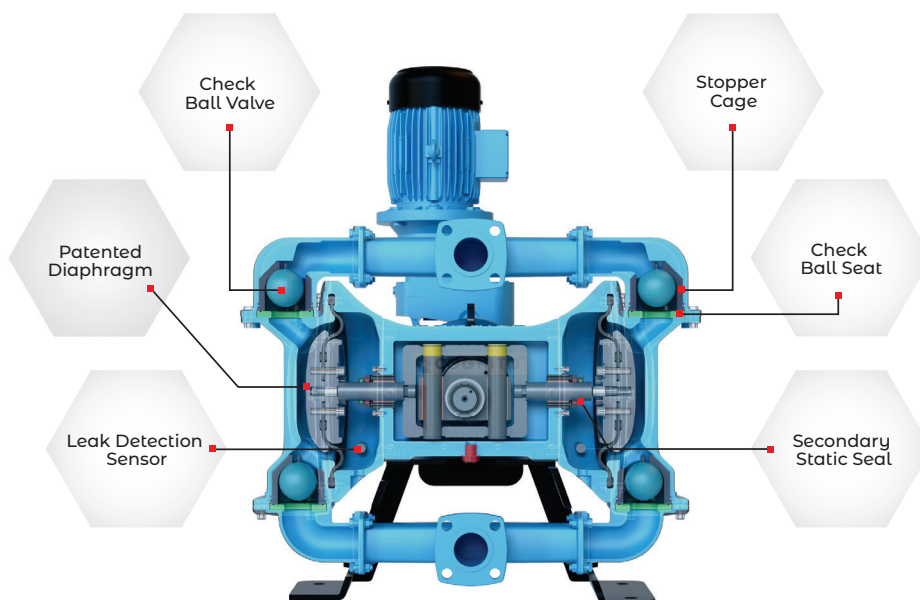

Product Range

Size	25 MM (1"), 51 MM (2"), 76 MM (3"), 101 MM (4")
Max flow	Up to 800 LPM (211 GPM)
Solid handling	Up to 9 MM (.35")
Available motor configurations	Vertical and Inline
Materials of construction	
Pump body	Aluminum, Stainless Steel
Elastomers (diaphragms, valve balls)	Neoprene, Santoprene, PTFE, Nitrile
Certifications	CE, ATEX Compliant


Material Profile

CAUTION! Operating temperature limitations are as follows

	Operating Temperature	
	Maximum	Minimum
SANTOPRENE®: Injection-molded thermoplastic elastomer with no fabric layer. Long mechanical flex life. Excellent abrasion resistance.	275°F 135°C	-40°F -40°C
NEOPRENE: All purpose. Resistance to vegetable oils. Generally not affected by moderate chemicals, fats, greases and many oils and solvents. Generally attacked by strong oxidizing acids, ketones, esters and nitro hydrocarbons and chlorinated aromatic hydrocarbons.	200°F 93°C	-10°F -23°C
VIRGIN PTFE: (PFA/TFE) chemically inert, virtually impervious. Very few chemicals are known to chemically react with PTFE; molten alkali metals, turbulent liquid or gaseous fluorine, and a few fluorochemicals such as chlorine trifluoride or oxygen difluoride, which readily liberate free fluorine at elevated temperatures.	220°F 104°C	-35°F -37°C
NITRILE: General-purpose, oil-resistant. Shows good solvent, oil, water and hydraulic fluid resistance. Should not be used with highly polar solvents like acetone and MEK, ozone, chlorinated hydrocarbons, and nitro hydrocarbons.	190°F 88°C	-10°F -23°C

Specifications


Suction/discharge port size	25 MM (1") / Aluminum and Stainless Steel - NPT or BSP (internal)
Maximum flow rate	110 LPM (29 GPM)
Maximum operating pressure	6 Bar (87 PSI), *8 Bar (116 PSI)
Ambient temperature	-20°C to +55°C (-4°F to +131°F)
Operating (process fluid) temperature	-10°C to +120°C (14°F to +248°F)
Solids-handling	Up to 5 MM (.19")
Heads up to	60 meter (196 FT), 80* meter (262 FT)
Displacement per cycle	0.6L (.16 Gal) or 0.44L (.11 Gal)
Maximum suction lift	8+ meter (26 FT) – wet 4.5 meter (14 FT) – dry
Motor and gearbox	1.5 KW (2 HP)
Sound level	< 80 DB
Material of construction	
1) Pump wetted parts	Aluminum, Stainless Steel
2) Diaphragm and check ball valve	Nitrile, Santoprene, PTFE + Santoprene
* With reduced stroke	

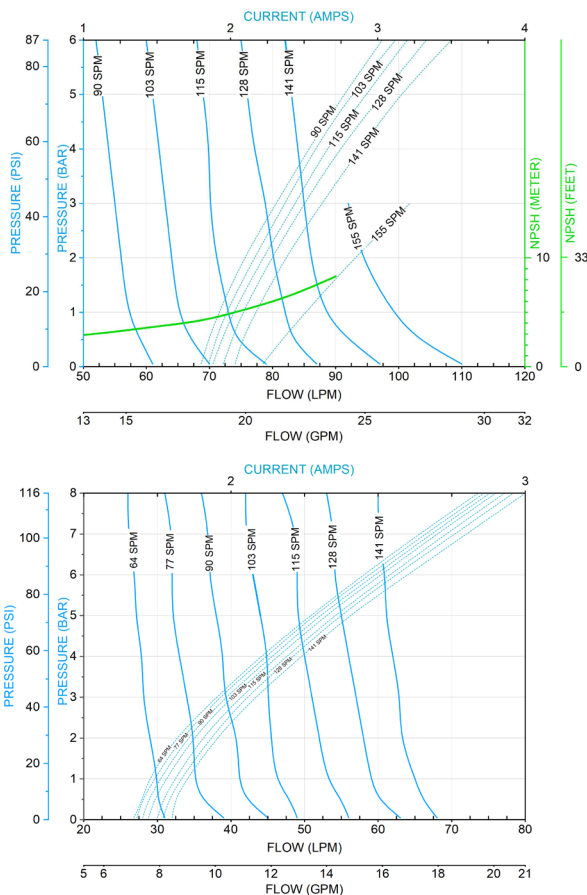

Notes:

1. Use 2 HP/1.5 KW motor for above 2.5 AMPS
2. The Performance curve is based on following: Santoprene elastomer fitted pump, flooded suction, water at ambient condition 25°C (77°F), with Cognito Dampener
3. The performance result may deviate in excess of 5% based on elastomer
4. Performance vary based on viscosity
5. NPSH-R curve at 6 Bar maximum discharge condition

Specifications	
Suction/discharge port size	51 MM (2") / Aluminum - ANSI 150# Raised Face Flanges / Stainless Steel - NPT or BSP (internal)
Maximum flow rate	300 LPM (79 GPM)
Maximum operating pressure	*8 Bar (< 103 SPM) (116 PSI)
Ambient temperature	-20°C to +55°C (-4°F to +131°F)
Operating (process fluid) temperature	-10°C to +120°C (14°F to +248°F)
Solids-handling	Up to 5 MM (0.19")
Heads up to	80 meter (262 FT)
Displacement per cycle	1.48 liter (.39 GAL)
Maximum suction lift	8+ meter (26 FT) wet 4.2+ meter (14 FT) dry*
Motor and gearbox	3.7 KW (5 HP)
Sound level	< 80 DB
Material of construction	
1) Pump wetted parts	Aluminum, Stainless Steel
2) Diaphragm and check ball valve	Santoprene, PTFE + Santoprene
* Applicable for Santoprene and PTFE Diaphragm only	

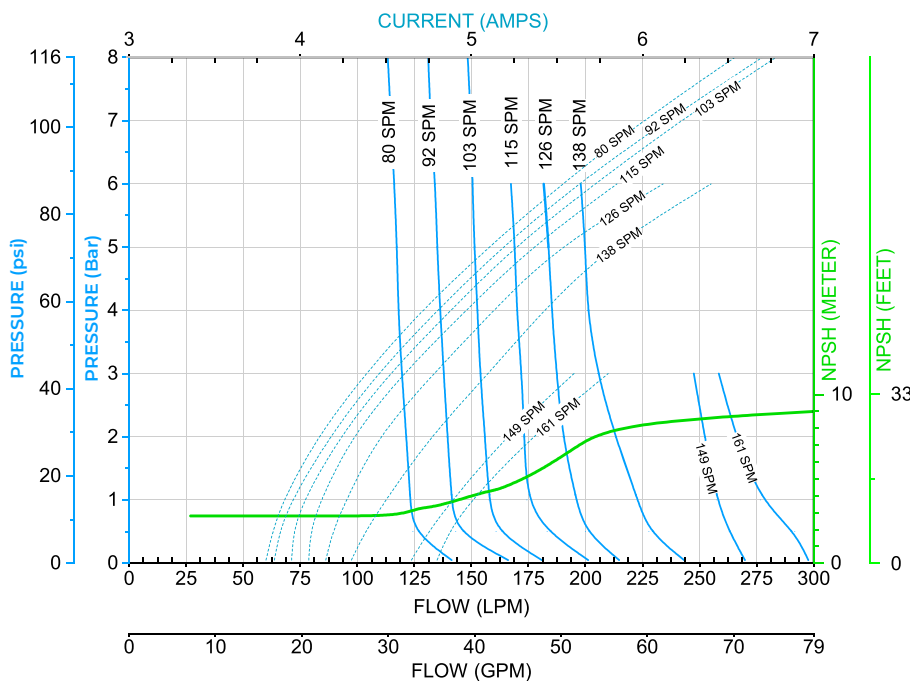


Specifications

Suction/discharge port size	76 MM (3") / Aluminum - ANSI 150# Raised Face Flanges / Stainless Steel - NPT or BSP (internal)
Maximum flow rate	510 LPM (135 GPM)
Maximum operating pressure	6 Bar (STD stroke) (87 PSI)
Ambient temperature	-20°C to +55°C (-4°F TO +131°F)
Operating (process fluid) temperature	-10°C to +120°C (14°F TO +248°F)
Solids-handling	Up to 7 MM (.27")
Heads up to	60 meters (196 FT)
Displacement per cycle	2.9 liter (.76 GAL)
Maximum suction lift	8+ meter (26 FT) and 5.1 meter (16 FT) dry*
Motor and gearbox	5.5 KW (7.5 HP)
Sound level	< 80 DB
Material of construction	
1) Pump wetted parts	Aluminum, Stainless Steel
2) Diaphragm and check ball valve	Neoprene, Santoprene, PTFE + Santoprene
* Applicable for Santoprene and PTFE Diaphragm only	




Notes:

1. Use 7.5 HP / 5.5 KW motor for above 7 AMPS
2. For SPM 152 and 133, contact IDEX Team
3. The performance curve is based on following: Santoprene elastomer fitted pump, flooded suction, water at ambient conditions 25°C (77°F), with Cognito Dampener
4. The performance result may deviate in excess of 5% based on elastomer
5. Performance vary based on viscosity
6. NPSH-R curve at 6 Bar Maximum discharge condition

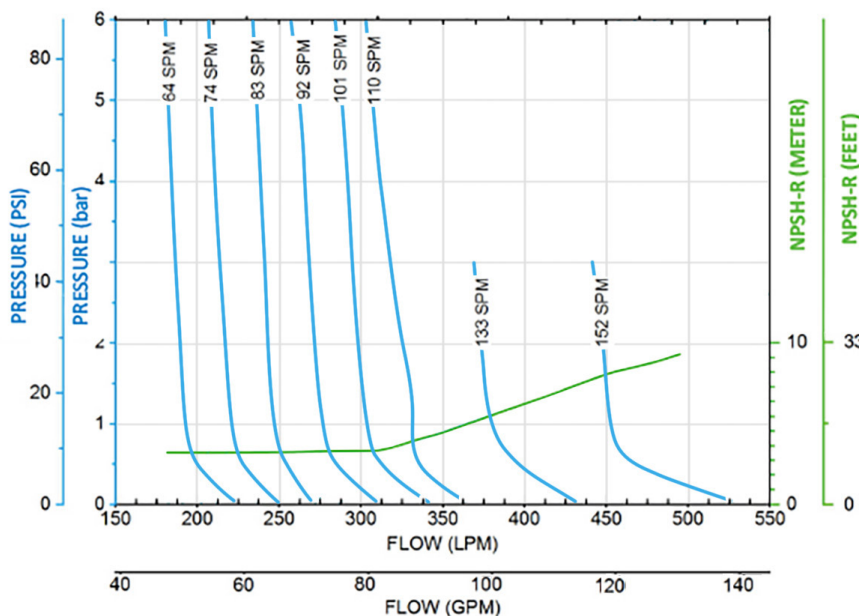



Specifications

Suction/discharge port size	101 MM (4") / Aluminum - ANSI 150# Raised Face Flanges / Stainless Steel - NPT or BSP (internal)
Maximum flow rate	800 LPM (211 GPM)
Maximum operating pressure	6 Bar (87 PSI)
Ambient temperature	-20°C to +55°C (-4°F TO +131°F)
Operating temperature	-10°C to +120°C (14°F TO +248°F)
Solids-handling	Up to 9 MM (.35")
Heads up to	60 meter (196 FT)
Displacement per cycle	4.75 liter (1.25 GAL)
Maximum suction lift	8+ meter (26 FT) and 5.1 meter (16 FT) dry*
Motor and gearbox	7.4 KW (10 HP)
Sound level	< 80 DB
Material of construction	
1) Pump wetted parts	Aluminum, Stainless Steel
2) Diaphragm and check ball valve	Neoprene, Santoprene, PTFE + Santoprene
* Applicable for Santoprene and PTFE Diaphragm only	

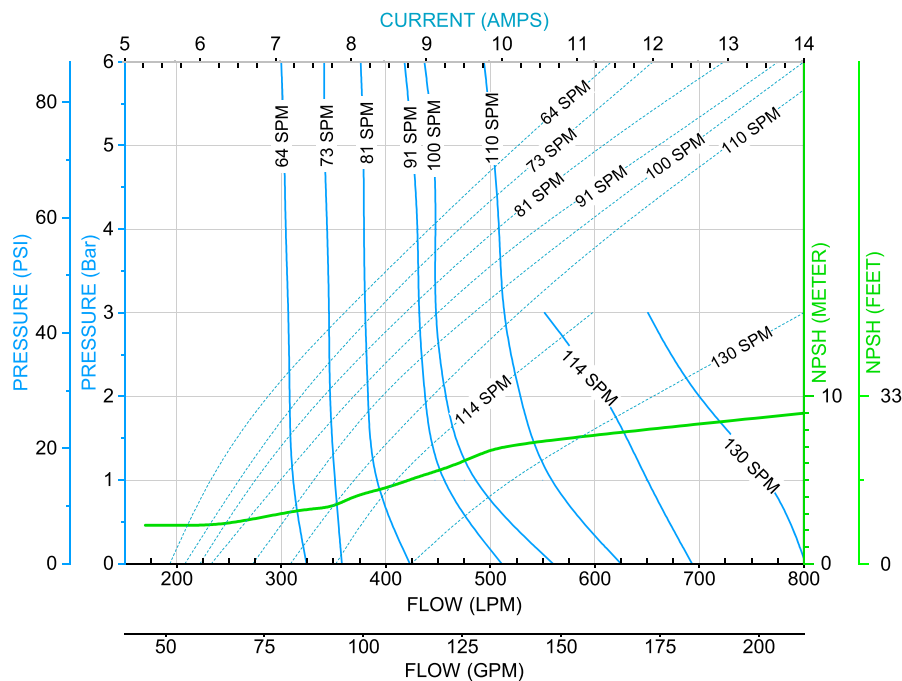

Notes:



1. Use 10 HP / 7.4 KW motor for above 10 AMPS
2. For SPM 130 and 114, contact IDEX Team
3. The performance curve is based on following: Santoprene elastomer fitted pump, flooded suction, water at ambient conditions 25°C (77°F), with Cognito Dampener
4. The performance result may deviate in excess of 5% based on elastomer
5. Performance vary based on viscosity
6. NPSH-R curve at 6 Bar maximum discharge condition

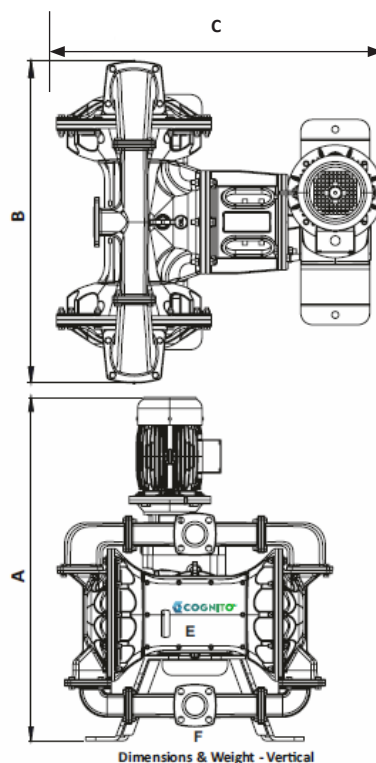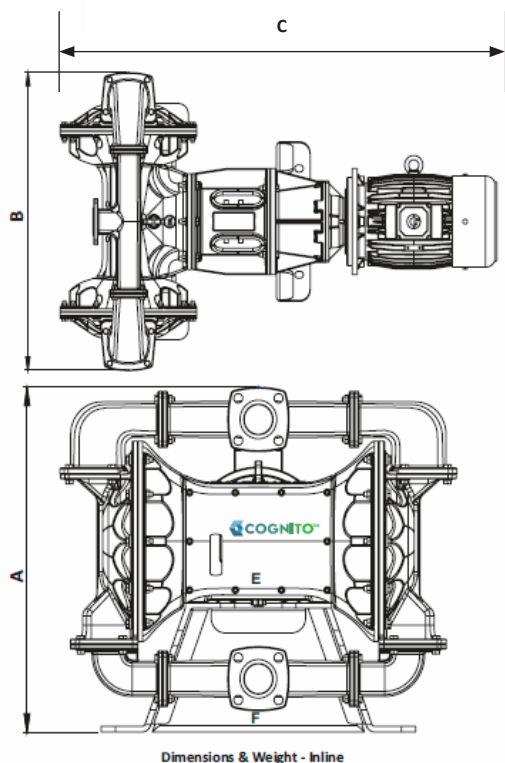

Dimension & Weight Details - Inline		101 MM (4")	76 MM (3")	51 MM (2")
Aluminum				
Height MM (IN)	A	879 (34.61)	740 (29.13)	600 (23.62)
Width MM (IN)	B	1017 (40.04)	850 (33.46)	735 (28.93)
Length MM (IN)	C	1520 (59.84)	1295 (50.98)	1060 (41.73)
Approx. Weight KG (LBS) - Bare Pump	W	409 (902)	220 (485)	105 (231.49)
Approx. Weight KG (LBS) - Pump + Motor + Gearbox + Dampener*	W	605 (1334)	365 (804)	221 (487)
Stainless Steel				
Height MM (IN)	A	837 (32.95)	707 (27.83)	570 (22.44)
Width MM (IN)	B	1017 (40.04)	833 (32.76)	735 (28.93)
Length MM (IN)	C	1520 (59.84)	1295 (50.98)	1060 (41.73)
Approx. Weight KG (LBS) - Bare Pump	W	469 (1034)	260 (573)	131 (289)
Approx. Weight KG (LBS) - Pump + Motor + Gearbox + Dampener*	W	675 (1488)	415 (914)	257 (566)

Dimension & Weight Details - Vertical		101 MM (4")	76 MM (3")	51 MM (2")
Aluminum				
Height MM (IN)	A	1390 (54.72)	1220 (48.03)	1080 (42.51)
Width MM (IN)	B	1017 (40.04)	850 (33.46)	735 (28.93)
Length MM (IN)	C	1100 (43.31)	925 (36.42)	775 (30.51)
Approx. Weight KG (LBS) - Bare Pump	W	409 (901.6)	220 (485)	105 (231)
Approx. Weight KG (LBS) - Pump + Motor + Gearbox + Dampener*	W	605 (1334)	365 (804)	221 (487)
Stainless Steel				
Height MM (IN)	A	1390 (54.72)	1220 (48.03)	1050 (41.34)
Width MM (IN)	B	1017 (40.03)	833 (32.76)	735 (28.93)
Length MM (IN)	C	1100 (43.31)	925 (36.42)	775 (30.51)
Approx. Weight KG (LBS) - Bare Pump	W	469 (1034)	260 (573)	131 (289)
Approx. Weight KG (LBS) - Pump + Motor + Gearbox + Dampener*	W	675 (1488)	412 (914)	257 (566)

*Weight may vary based on the motor and gearbox make.

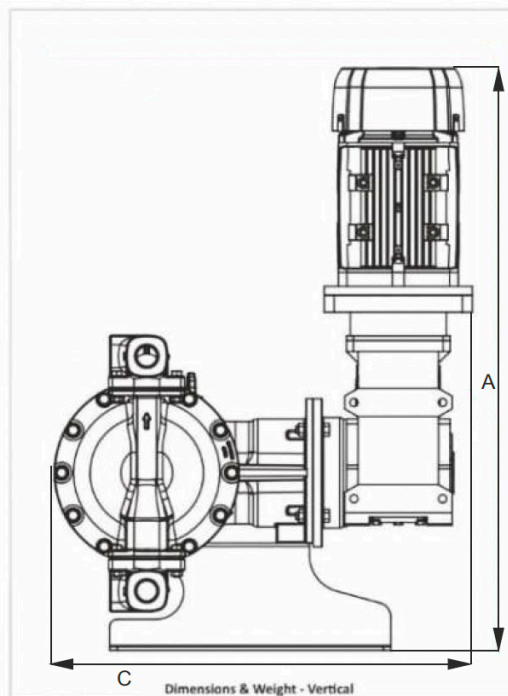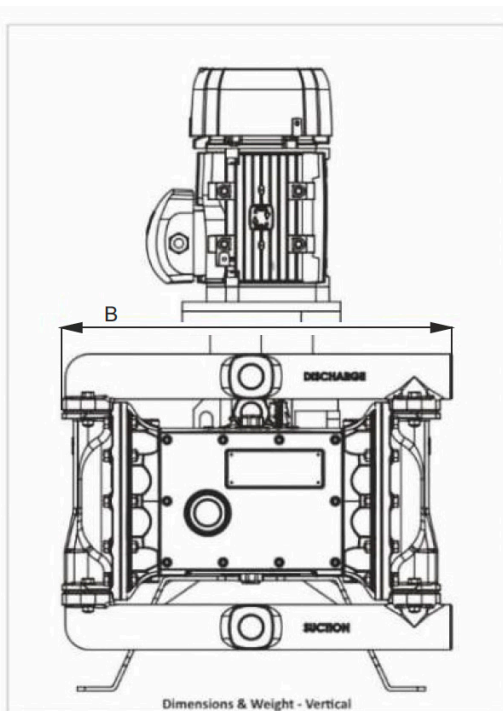

Dimension & Weight Details - Vertical		25 MM (1")
Aluminum		
Height MM (IN)	A	850 (33.46)
Width MM (IN)	B	495 (19.49)
Length MM (IN)	C	720 (28.34)
Approx. Weight KG (LBS) - Bare Pump	W	60 (132.28)
Approx. Weight KG (LBS) - Pump + Motor + Gearbox*	W	127 (198)
Stainless Steel		
Height MM (IN)	A	85 (33.46)
Width MM (IN)	B	495 (19.49)
Length MM (IN)	C	720 (28.34)
Approx. Weight KG (LBS) - Bare Pump	W	75 (165.35)
Approx. Weight KG (LBS) - Pump + Motor + Gearbox*	W	127 (198)

*Weight may vary based on the motor and gearbox make.

A pulsation dampener uses a flexible diaphragm to separate a liquid chamber from a compressed air chamber. A rod connected to the center of the diaphragm activates the air inlet and exhaust, which automatically admits or exhausts air to the air chamber. This maintains the diaphragm in mid-range stroke to eliminate flow pulsation and pressure spikes.

Cognito Dampeners are suitable for EODD pump models and are available in Aluminium and stainless-steel wetted housings.

Technical Specification

Dampener Size	Compatible Pump Size	Air Inlet Size	Max Pressure	Fluid Port
1"	1"	1/8" NPT	116 PSI (8 bar)	1" NPT / BSP Female Threaded Port
2"	1"	1/8" NPT	116 PSI (8 bar)	2" 150# ANSI
	1.5"	1/8" NPT	116 PSI (8 bar)	2" 150# ANSI
	2"	1/8" NPT	116 PSI (8 bar)	2" 150# ANSI
3"	3"	1/8" NPT	116 PSI (8 bar)	3" 150# ANSI
	4"	1/8" NPT	116 PSI (8 bar)	3" 150# ANSI
Working Ambient Temperature			-20°C (-4°F) to +55°C (131°F)	
Operating (process fluid) Temperature			-10°C (14°F) to +120°C (248°F)	

Note: Contact Warren Rupp for Polypropylene Dampener

Material of Construction

Size	Model Number	Wetted Parts	
		Body	Diaphragm
1"	1ASU/25ASU	Aluminium	Santoprene
	1APU/25APU	Aluminium	Santoprene Backup / PTFE
	1SSU/25SSU	Stainless Steel	Santoprene
	1SPU/25SPU	Stainless Steel	Santoprene Backup / PTFE
2"	2ASU	Aluminium	Santoprene
	2APU	Aluminium	Santoprene Backup / PTFE
	2SSP	Stainless Steel	Santoprene
	2SPU	Stainless Steel	Santoprene Backup / PTFE
3"	3ASU	Aluminium	Santoprene
	3SPU	Aluminium	Santoprene Backup / PTFE
	3SSU	Stainless Steel	Santoprene
	3SPU	Stainless Steel	Santoprene Backup / PTFE


- Do Not Run Dampener Without Air Supply
- Recommended Air Inlet Pressure: 14 PSI (1 bar) Higher from the Discharge Pressure
- This Dampener is Automatic Air Controlling Type

Dimensional Drawing


1" Dampener weight:

Aluminum:
9 KG (20 LBS)

Stainless Steel:
11 KG (24 LBS)

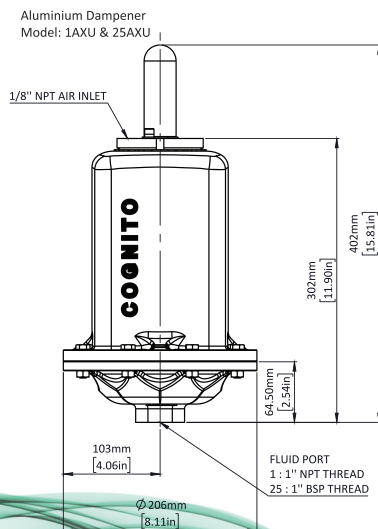

All Dimensions +/- 3mm [0.13 in]
Where X is Diaphragm Material

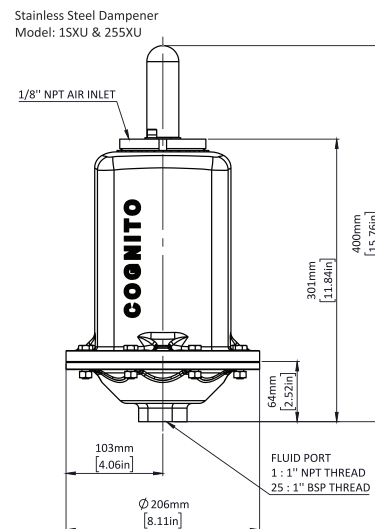


2" Dampener weight:


Aluminum:
16 KG (35 LBS)

Stainless Steel:
19 KG (42 LBS)

Aluminium Dampener
Model: 2AXU

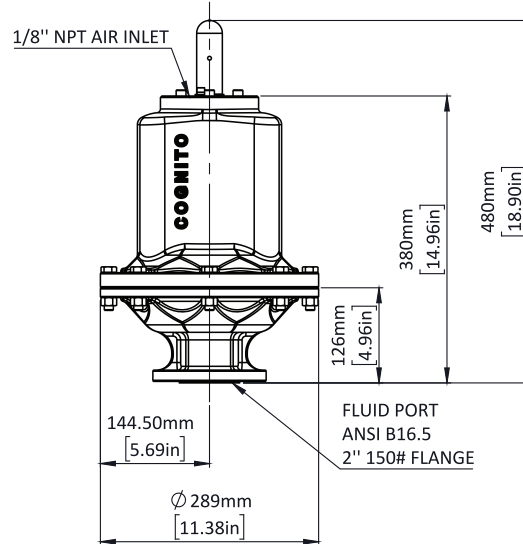

Stainless Steel Dampener
Model: 2SXU

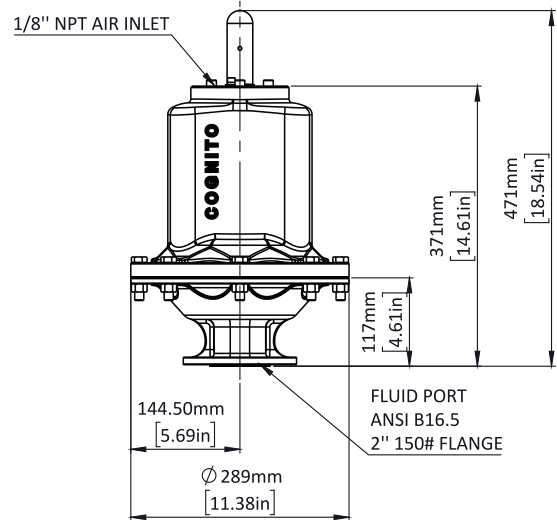


All Dimensions +/- 3mm [0.13 in]
Where X is Diaphragm Material

3" Dampener weight:


Aluminum:
21 KG (46 LBS)

Stainless Steel:
25 KG (55 LBS)

Aluminium Dampener
Model: 3AXU



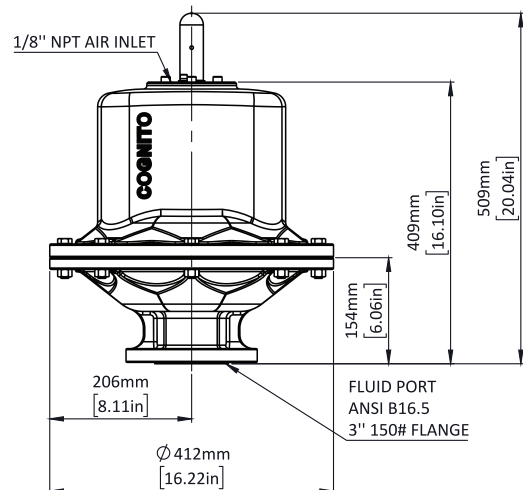


Stainless Steel Dampener
Model: 3SXU

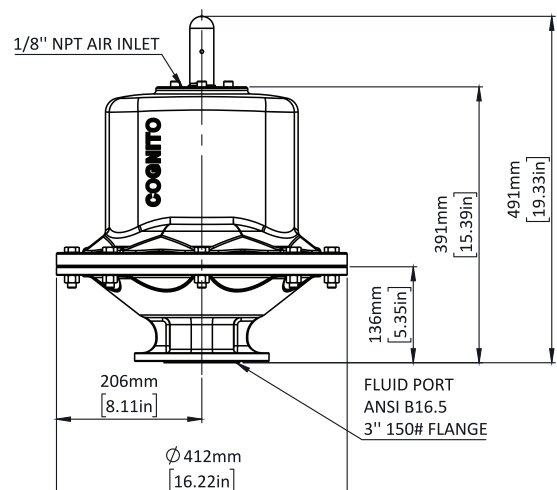

All Dimensions +/- 3mm [0.13 in]
Where X is Diaphragm Material

COGNITOSmartINSIGHTS is a web-based portal that can be accessed from anywhere and provides real-time updates for all your installed Cognito pumps helping you remotely monitor critical applications.

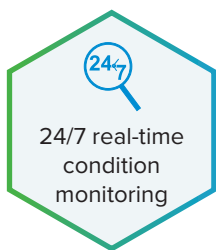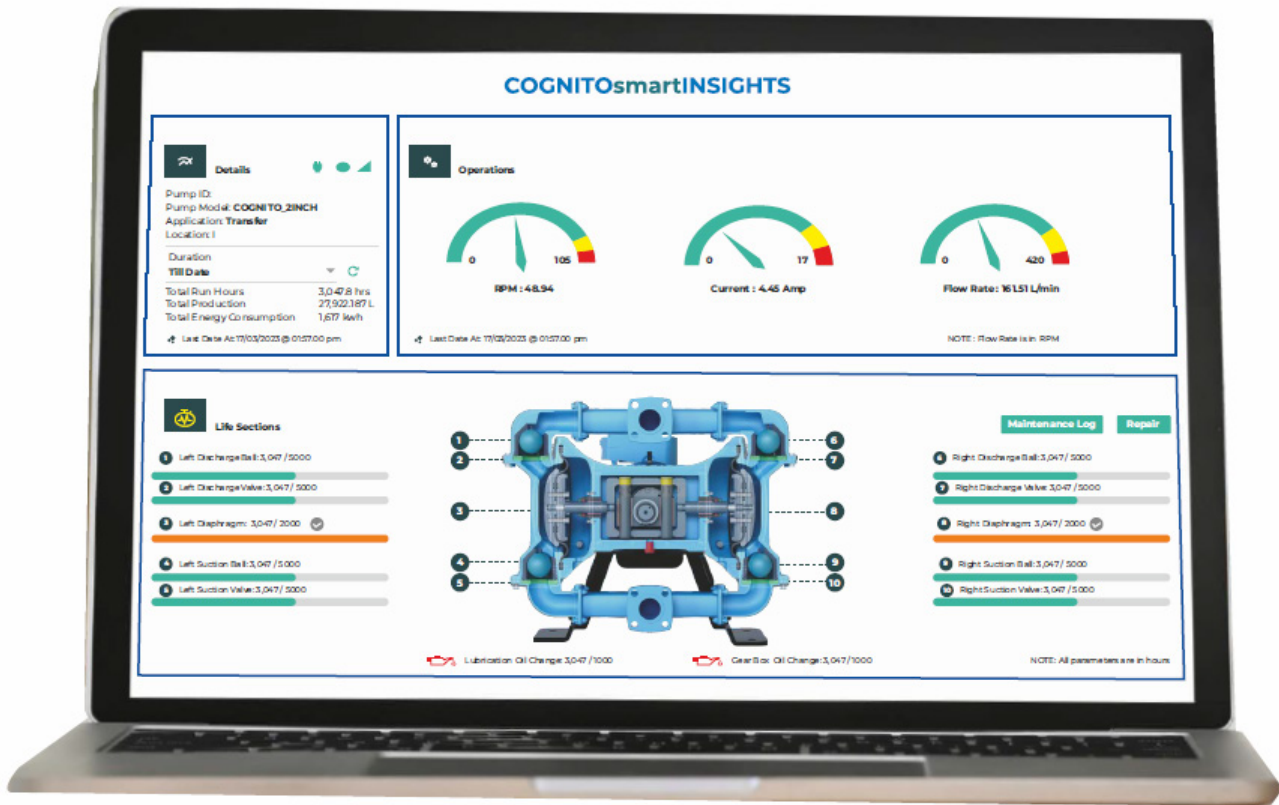

COGNITOSmartINSIGHTS helps you to connect, monitor and analyze your equipment remotely, enabling you to make better and faster decisions to optimize your equipment performance and improve overall process efficiency. Its advanced smart technology creates instant alerts for any abnormalities to enhance the process.

*Only available in specific regions. Please contact your local sales rep to learn more.

Applications

- ✓ Slip transfer
- ✓ Slurry transfer
- ✓ Filter press
- ✓ Glaze transfer
- ✓ Ball mill unloading



Ceramic and Tiles



Foundry and Refractory



Tableware and Insulators



Paint, Dye and Inks



Chemicals




Li-ion Battery

Applications

- ✓ Slurry transfer
- ✓ Emulsion transfer
- ✓ Resin transfer
- ✓ Solvent transfer
- ✓ Final paint (water based) transfer to final filler (packing)

Applications

- ✓ Filter press
- ✓ Sludge transfer
- ✓ Starch & dye transfer
- ✓ AFR (alternate fuel & raw material) transfer-cement industry
- ✓ PCC and GCC (precipitated calcium carbonate & ground calcium carbonate) transfer-paper industry

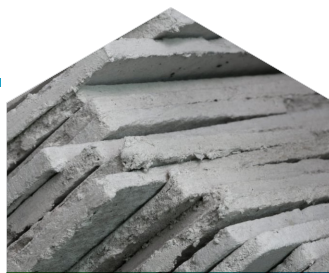

Building Products



Water and Wastewater Treatment



Pulp and Paper (Packaging)



Pharma



Latex



Packaging

Applications

- ✓ Latex transfer
- ✓ Glue transfer
- ✓ Solvent & chemical transfer
- ✓ Lacquer transfer

Cognito, a Warren Rupp brand, specializes in thoughtfully engineered electrically operated double diaphragm pumps and accessories. Our products are designed to transfer the most challenging fluids efficiently, safely, and dependably. Our goal is to deliver unparalleled reliability, ease of use, and simplified maintenance for long-lasting customer satisfaction. For further information on Cognito and its products, visit www.cognitopump.com.



/cognitopump



@CognitoEODD



cognitopump.com/contact

About Warren Rupp

For over 50 years, Warren Rupp, Inc. has been a leading manufacturer of pumps. The company was founded on the principle of building 'new and different pumps' as the 'Originators in Pumping' by Warren E. Rupp and Charles E. Young, Jr. in Mansfield, Ohio, in 1965.

Today, Warren Rupp's engineered solutions for various industrial markets are sold worldwide through a network of independent, factory-authorized distributors. Our products and services are marketed in over 60 countries and in nearly every major trading area. We continue to enable customers to make better-informed pump choices for their applications. There is no other pump type on the market today that is universally applicable and so responsive to pumping problem fluids like our pumps. For further information on Warren Rupp and its business units, visit warrenruppinc.com.





APPLICATIONS ENGINEERING, CUSTOMER SERVICE, AND AFTER SALES SUPPORT

From product selection, to troubleshooting, our team of experts is ready to help.



PRODUCT ENDURANCE LAB

Ensures product performance and drives product enhancements.



DEDICATED TEAM TO SUPPORT YOU

Providing product expertise, personalized service, and after sales support.



GENUINE KITS AND PARTS

Provide guaranteed quality and ease of maintenance.

About IDEX Corporation

IDEX designs and builds engineered products and mission-critical components that make everyday life better. Founded in 1988 with three small, entrepreneurial manufacturing companies, IDEX now includes more than 50 diverse businesses around the world, and manufacturing operations in more than 20 countries. For further information on IDEX Corporation and its business units, visit www.idexcorp.com.



Register Office and Plant**IDEX India PVT LTD**

Survey No. 256, Near Bombardier Circle,
GIDC Manjusar, Savli, Dist. Vadodara
391770, State Gujarat, India

Tel: 91-2667-662-001

Corporate Office - India**IDEX India PVT LTD**

4th Floor, S 14 Solitaire Corporate Park,
Guru Hargovindji Rd, Chakala, Andheri
(East), City: Mumbai 400 093, India

Tel: 022-6643-5555

North America Office**Warren Rupp**

800 North Main Street
Mansfield, Ohio 44902

Tel: (419)-524-8388

China Office**IDEX Trading (Shanghai) Co. Ltd.**

Room 3502-3505, No. 1027
Chang Ning Road,

Zhaofeng Plaza, Shanghai,
China 200050

Tel: +86 21 52415599

South East Asia Office**IDEX Asia Pacific Pte Ltd**

#01-01A, 11 Ubi Road 1,
Meiban Industrial Building,
Singapore 408723

Tel: +65 6684 7300

Middle East Office**IDEX Middle East FZE**

P. O. Box No. 61290RA08-TA07

Jebel Ali Free Zone

Dubai – UAE

WARREN RUPP, INC.

Warren Rupp, Inc.
A Unit of IDEX Corporation
800 North Main Street
Mansfield, OH 44902 USA
Phone: 419.524.8388



/cognitopump



@CognitoEODD

© Copyright 2025 Warren Rupp, Inc. All Rights Reserved

CogGlobalBrochure_6_2025



www.cognitopump.com/contact